


ALPHA 10A PROALPHA SERIES

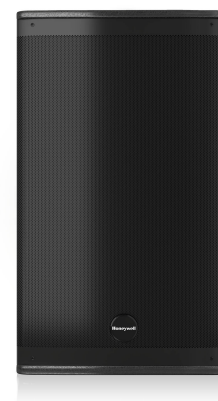

- High definition for touring or installation
- Reliable high quality wooden cabinets
- Built-in DSP for HD sound
- Multiple presets for any application
- High quality amplification built-in

Technical Specification

System Type	10", High Power 2-Way Active Loudspeaker with DSP
Max SPL Output	129dB
LF Driver	10" Driver with 2.5" Voice Coil
HF Driver	1" Driver with 1.75" Voice Coil
Coverage Pattern	90 H X 60 V
Frequency Response (-6dB)	55Hz- 20KHz
Crossover Frequency	1.8 KHz
Power Rating	1600W (Program)/ 3200W (Peak)
Connectors	1 X Line/Mic Combo, 1 X Link XLR
DSP Presets	Flat / Loudness
External Controls & Indications	Volume Control/ Green LED - Power ON /Red LED - Clip Indicator/ Ground Lift/ Input Sensitivity switch / Logo LED switch
Electronic Protections	Thermal / Convection-Fan / Overload / Digital Lim. / Compressor
Power Supply	110V - 120V / 220 - 240V, 50/60Hz
Suspension / Mounting	36mm pole socket, 12XM10 Suspension Points
Enclosure Construction	Plywood cabinet, weather resistant black paint, metal grille with black foam, rubber feet, plastic handles
Dimensions (HXWXD)	583 x 333.2 x 325mm
Net Weight	19.7 Kg

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122002